






TS-800°

Trigger Sprayer

The Benchmark By Which Standard-Output Trigger Sprayers Are Measured

The TS-800® trigger sprayer offers proven reliability, unmatched flexibility, excellent aesthetics and superior functional features. Twenty-six different spray/stream/foam nozzle combinations are available to suit your particular product requirements, including a specialized mesh foamer. Nozzles can be hot stamped with your choice of logo, words or graphics. Lock-in settings provide positive switching from one position to the next, and tamper-evident nozzles are also available, as are anti-rotation and non-removable closures. All-polyolefin construction means the TS-800 is compatible with a broad range of products, including household chemicals, automotive care products, lawn and garden products, and pet care formulations; Calmar's unique Option X provides enhanced chemical compatibility for more demanding applications.

The TS-800 has a highly stylized, ergonomic, low-profile shroud. Three designs are offered: standard, Ergo® and Ultra Ergo®. Consumers prefer their comfortable hand feel and easy-pull, low force-to-actuate triggers, which permit continuous activation without fatigue. Strict quality control ensures the highest standards of performance, including minimal strokes-to-prime, high valving efficiency and internal seal integrity.

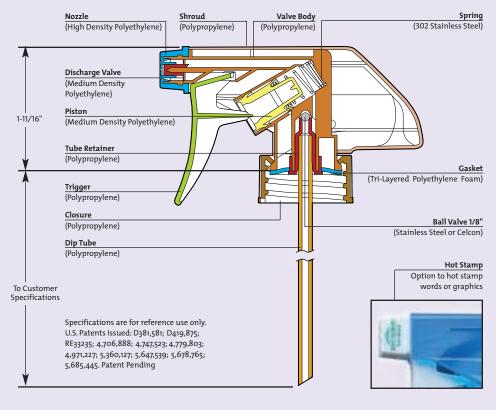

Nozzle Options:













Mesh Foamer

Features & Benefits

- Easy-pull, low force-to-actuate trigger
- Exclusive lock-in nozzle
- Choice of 2 ergonomic shrouds*
- 26 spray, stream and foam nozzle configurations
- 2- or 3*-finger triggers
- Automated shroud labeling*
- Angled dip tube for maximum product evacuation*
- Hot stamp nozzle*
- Friendly to pump placement equipment
- * surcharge applies

General Information

Delivery Volume per Stroke - Nominal .9occ.

Colors - All external components are available in standard white. Nozzles, triggers and closures are available in the following stock colors: red, blue, yellow, green and black. Optional custom colors are available at a nominal price surcharge.

Closure Sizes - The TS-800 is designed to fit plastic containers with 28-400 or 28-410 special "H" (European) neck finishes.

Carton – 275-lb. test single wall. 19-5/8" x 13" x 15". 2.4 cu. ft. Lined with polyethylene bag.

Pack and Weight - Varies with closure size and shroud. Average pack is 300 or 375 units per carton, weighing approximately 21 lbs.

Pump to Container Seal - The unit has excellent sealing features and can be shipped safely assembled to a filled container. Available with a variety of gasket materials suitable for proper sealing with all popular plastic container materials.

Compatibility - Compatibility testing is recommended if there are questions or concerns. Calmar offers complete laboratory testing assistance and provides recommendations to assist customers with their final packaging decision.

Metal Components - The standard spring and ball valve are 302 stainless steel. Should compatibility questions arise, other materials are available.

Samples – Readily available for product evaluation purposes. Contact your local sales representative.

For Your Custom Needs...

Calmar can help you satisfy unique product specifications and marketing demands that can't be addressed by standard configurations. Call your Calmar sales representative for details.



Saint-Gobain Calmar Inc.

1001-11 South 291 Highway, Lee's Summit, MO 64081 Tel: (800) 599-2124 Fax: (816) 246-3520 www.calmar.com